

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 December 2003 (18.12.2003)


PCT

(10) International Publication Number
WO 03/103418 A1

- (51) International Patent Classification⁷: **A23L 3/24**,
A23C 3/037
- (21) International Application Number: PCT/SE03/00927
- (22) International Filing Date: 5 June 2003 (05.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0201722-6 6 June 2002 (06.06.2002) SE
- (71) Applicant (for all designated States except US): **TETRA LAVAL HOLDINGS & FINANCE SA** [CH/CH]; Avenue Général-Guisan 70, CH-1009 PULLY (CH).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **PALM, Bengt** [SE/SE]; Nylyckevägen 4, S-240 13 GENARP (SE).
- (74) Agent: **BRUNNSTRÖM, Gunilla**; Patent Department, AB Tetra Pak, Ruben Rausing's gata, S-221 86 Lund (SE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: AN APPARATUS IN AN INFUSER FOR A LIQUID FOOD PRODUCT

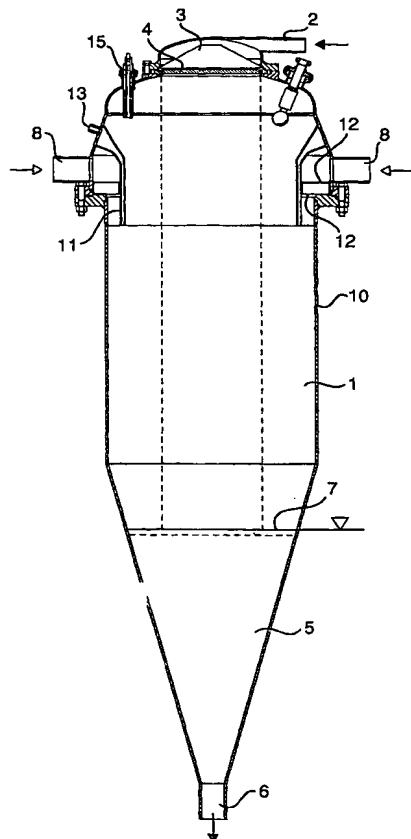

(57) Abstract: The invention relates to an apparatus in an infuser for a liquid food product. The infuser is of the type which includes a pressure vessel (1) with an inlet (2) for the product located in its upper region and an outlet (6) for the product located in its lower region. In the product inlet (2) there is a device for dividing the product entering into the pressure vessel (1) into small droplets. The infuser also includes an inlet (8) for steam. The steam inlet (8) is disposed so that steam enters into the upper region of the pressure vessel (1) through a concentric distribution chamber (9). The distribution chamber (9) is defined by the wall (10) of the pressure vessel (1), a guide plate (11) and at least one foraminated plate (12).

WO 03/103418 A1

03/103418 A1



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

AN APPARATUS IN AN INFUSER FOR A LIQUID FOOD PRODUCT

TECHNICAL FIELD

The present invention relates to an apparatus in an infuser for a liquid food
5 product, of the type which comprises a pressure vessel with an inlet located in its
upper region for the product and an outlet located in its lower region for the product,
the product inlet being disposed to finely divide the product entering into the
pressure vessel into small droplets, and the infuser also including an inlet for steam,
the inlet being disposed such that steam enters into the upper region of the pressure
10 vessel through a concentric distributor chamber.

BACKGROUND ART

Heat treating food products for increased shelf-life is a well-known and often
employed method in the art. The food products may, for example, be various dairy
15 produce such as milk, cream or yoghurt. The heat treatment may take place in a
plurality of ways, directly or indirectly. Indirect methods are, for example, heating
using different types of heat exchangers. Of the direct methods there are two major
groups, injection or infusion with steam. By employing a direct method, there will be
obtained a very rapid heating, which is highly desirable today when, in order to
20 improve the flavour properties, for example, in milk, the intention is many times to
heat the product to elevated temperatures for a short period of time.

The present invention relates to an apparatus where use is made of infusion
heating. Infusion entails heating a finely divided liquid in a steam chamber. The
principle of heating a liquid, for example a liquid food, by injecting the liquid into a
25 chamber filled with steam has been known from the early 19th century.

The first infusion heating plants were based on the same principle as
condensers, with which excess steam from various chemical processes was
condensed. The prior art plants thus included an infuser which consisted of a
pressure vessel with an inlet for the product in the upper region of the pressure
30 vessel. A distributor chamber discharged in the inlet, the distribution chamber finely
dividing the incoming product into small, fine liquid droplets. In the bottom of the
pressure vessel there is an outlet for the heated product. The pressure vessel was

further provided with an inlet for steam which, in these early infusers, was located in the lower region of the pressure vessel. The steam which, at a low level in the pressure vessel, is injected in towards the finely divided liquid droplets, causes the droplets to change direction. This was a disadvantage when these infusers were, for example, employed for milk. Many of the droplets adhered to the hot inner walls in the infuser, where fouling by the product was the immediate consequence. Fouling entails major hygienic problems and is very difficult to wash off.

One way of obviating the problem inherent in fouling of product on the inner walls of the infuser is to place the steam inlet in the upper region of the infuser. The steam is supplied from above over the distribution chamber of the product so that the droplets are not disturbed in their fall down through the steam chamber. But the admission of steam concurrently with the admission of product also has its drawbacks. This type of steam admission can give rise to fouling of the product around or in the distribution holes or distribution gaps which the distribution chamber of the product inlet displays. This disturbs the heating of the product, the temperature of the product falls, in which event the steam pressure must be increased, and higher temperature differences will be obtained between product and steam. By designing the distribution holes so that they have a very thin edge out towards the steam chamber, this problem can be solved. By thus having extremely thin fouling which is easily broken off, these foulings will disappear before they become disruptive.

But the concurrent admission of steam also involves problems with the incondensable gases which are always found in the product and which are given off in connection with its being heated. The steam also contains a part of these gases. The gases may consist of oxygen, nitrogen, carbon dioxide and others. These gases must be continuously removed in order to be able to maintain the steam temperature at the same pressure. As a result of a concurrent steam admission, the incondensable gases mix more easily with the steam and it becomes more difficult to remove them without unnecessarily releasing steam from the process as well.

Swedish Patent Specification SE 513 414 describes an infuser which has the steam inlet placed low down in the infuser vessel. As a result, space is created for the incondensable gases to accumulate in the upper region of the vessel, from whence

they may be removed from the process in a simple manner. The steam inlet consists of a concentric aperture in the casing surface of the vessel. But this positioning of the steam inlet entails that hot steam enters at high speed into the vessel relatively close to the accumulation of product which is normally formed in the lower region of the vessel before the product departs from the vessel. Steam can then entrain with it product splashes on its way upwards in the vessel and undesirable fouling will be the result.

OBJECT OF THE INVENTION

One object of the present invention is to realise a steam inlet which obviates the majority of the negative effects displayed by prior art solutions and which is disposed such that the steam is guided so that it is at a suitable speed and direction when it meets the product droplets.

SOLUTION

This and other objects have been attained according to the present invention in that the apparatus of the type described by way of introduction has been given the characterising feature that the concentric distribution chamber is defined by the wall of the pressure vessel, a guide plate and at least one foraminated plate.

Preferred embodiments of the present invention have further been given the characterising features as set forth in the appended subclaims.

BRIEF DESCRIPTION OF THE ACCOMPANYING DRAWINGS

One preferred embodiment of the present invention will now be described in greater detail hereinbelow, with reference to the accompanying Drawings. In the accompanying Drawings:

Fig. 1 is a side elevation, partly in section, of an infuser according to the present invention;

Fig. 2 is a side elevation, partly in section, of the steam inlet of the infuser;

Fig. 3 is a plan view of a first foraminated plate; and

Fig. 4 is a plan view of a second foraminated plate.

The Drawings show only those parts and details essential to an understanding of the present invention.

DESCRIPTION OF PREFERRED EMBODIMENT

5 Fig. 1 shows an infuser according to the present invention. The infuser essentially consists of a conventional pressure vessel 1. The pressure vessel 1 has, in its upper region, an inlet 2 for the product which is to be treated in the infuser. The product inlet 2 terminates with a distribution chamber 3. The distribution chamber 3 is centrally positioned in the vessel 1 and is, on its lower wall 4, provided with a
10 large number of holes or gaps. The holes or gaps are intended to finely divide the incoming product so that this first forms fine jets which then progressively change into small, fine droplets which fall down through the pressure vessel 1.

In the lower region, preferably the lowermost region, of the pressure vessel 1 where the pressure vessel 1 forms a conical termination 5, there is disposed an outlet
15 6 for the product which has been heat treated in the infuser. The lower region of the conical termination 5 of the pressure vessel 1 normally functions as a holding tube, where the product stays at a certain predetermined temperature and during a certain predetermined period of time before being pumped further for additional treatment. The holding tube is indicated in Fig. 1 by the level line 7. Other types of holding
20 tubes can also be employed together with the above described infuser.

An infuser according to the present invention is further provided with at least, and in the preferred embodiment two, inlets 8 for steam. The steam inlets 8 are radially disposed and discharge in a concentric distribution chamber 9 which surrounds the entire pressure vessel 1. The concentric distribution chamber 9 with its
25 steam inlets 8 is placed on a lower level in the vessel 1 than the distribution chamber 3 of the product, but relatively high up in the pressure vessel 1. By distributing the incoming steam over two inlets 8, the speed of the steam is retarded and it is distributed more efficiently in the concentric distribution chamber 9. Both steam inlets 8 are preferably diametrically disposed.

30 The concentric distribution chamber 9 is defined, on the one hand, by the wall 10 of the pressure vessel 1 and, on the other hand, by a guide plate 11 and at least one foraminated, concentric plate 12. The guide plate 11 is, in the preferred

embodiment, double and in the interspace between the guide plates 12 there is the possibility of introducing air at room temperature in order to cool down the guide plates 11. Air is supplied through the inlet 13.

The foraminated, concentric plate 12 is placed below the inlets 8 for steam. In the preferred embodiment, there are two foraminated plates 12 disposed above one another. Alternatively, there are three foraminated plates 12 placed above one another. The plates 12 may, as a result of the design of the pressure vessel 1, be of differing appearances, as is apparent from Fig. 3 and 4. Fig. 3 shows the upper, foraminated plate 12 and Fig. 4 the lower. Alternatively, and depending upon the design of the pressure vessel 1, both plates 12 may have the appearance as shown in Fig. 3.

The foraminated plates 12 display a very large number of small holes 14 disposed therein. The holes 14 have a diameter of 1-10 mm, preferably 2-5 mm. The apparatus according to the present invention has plates 12 which have 1000-1500 holes 14 each. The foraminated plates 12 should be sealingly secured against the casing wall 10 of the pressure vessel 1 and against the guide plate 11. If the anchorage is not completely tight, the incoming steam will take the path of least resistance into the pressure vessel 1, which normally implies that the steam will leak in at the side of the foraminated plates 12. The foraminated plates 12 should be placed in spaced apart relationship from one another a distance which at least corresponds to the diameter of the holes 14 multiplied by five. This is in order to damp the turbulence of the steam after it has passed the upper, foraminated plate 12.

The guide plates 11 should have an extent below the foraminated plates 12 which at least corresponds to the diameter of the holes 14 multiplied by ten. Preferably, the guide plates 11 have an extent below the foraminated plates 12 which is 50-60 mm in order to obtain as uniform a flow of steam as possible.

By the above described arrangement for admitting steam into the infuser, the speed and direction of the steam is controlled. When the steam finally enters into the pressure vessel 1, it should be at a speed of < 2 m/sec and should be directed downwards so that it is sucked into towards and accompanies the product when this falls down through the pressure vessel 1.

The product coming into the infuser is pumped through a conduit to the inlet 2 in the upper region of the pressure vessel 1. The incoming product which, for example, may consist of milk, is normally at a temperature of 75-82°C, in certain applications up to 120°C. From the inlet 2 and the distribution chamber 3, the product passes through a large number of holes or gaps provided in the lower wall 4 of the distribution chamber 3. The product thereby forms fine jets which progressively change into a large number of small droplets which fall freely through the pressure vessel 1 until they reach the liquid surface 7. After a short drop, downwardly directed steam will be sucked at a controlled speed in towards the product droplets. The steam which is pressurised is at a temperature of approx. 120-170°C, preferably 140-150°C.

By condensation, the steam rapidly heats the product droplets to the desired temperature, and when the droplets reach the liquid surface 7, the product has reached the desired temperature. The distance between the distribution chamber 3 of the product and the liquid surface 7 should be so large that the product droplets have time to reach the desired temperature. The ready-heated product will thereafter, for a certain period of time, stay in the conical termination 5 of the pressure vessel 1 before departing from the infuser through the outlet 6.

In that the admission of steam gives a controlled speed and direction for the steam, the risk will be minimised that the steam disturbs the fall of the product droplets through the pressure vessel. In that the product droplets may fall undisturbed, the splashing of product is reduced and thereby the fouling of product on the walls 10 of the pressure vessel 1 is consequentially reduced.

During the heating process, incondensable gases are released, such as oxygen, nitrogen and carbon dioxide, from the product. A certain quantity of incondensable gases will also come from the steam which is employed in the process. In that the coolest area in the infuser is disposed in the upper regions of the pressure vessel 1, the incondensable gases accumulate here and can be lead off from the infuser through the outlet 15. The apparatus according to the present invention, with steam inlets 8 and the concentric distribution chamber 9 placed under the distribution chamber 3 of the product, and in that the steam enters into the pressure vessel 1 downwardly directed, creates space for the incondensable gases. The incondensable

gases can be accumulated in the upper region of the pressure vessel 1 with as little admixture of steam as possible. As a result, the steam consumption of the process is also minimised.


As will have been apparent from the foregoing description, the present
5 invention realises an apparatus in an infuser which contributes in obtaining a steam admission into the infuser which is controlled in direction and speed in order to obtain an optimum product heating without the drawbacks which the prior art steam admission suffered from.


WHAT IS CLAIMED IS:

1. An apparatus in an infuser for a liquid food product, of the type which includes a pressure vessel (1) with an inlet (2) for the product located in its upper region and an outlet (6) for the product located in its lower region, said product inlet
5 (2) being disposed to divide the product entering into the pressure vessel (1) into small droplets, and the infuser also including an inlet for steam (8) disposed such that steam enters into the upper region (1) of the pressure vessel through a concentric distribution chamber (9), **characterised in that** the concentric distribution chamber
10 (9) is defined by the wall (10) of the pressure vessel (1), a guide plate (11) and at least one foraminated plate (12).
2. The apparatus as claimed in Claim 1, **characterised in that** the apparatus includes two foraminated plates (12) which are sealingly secured against the wall
15 (10) of the pressure vessel (1) and against the guide plate (11).
3. The apparatus as claimed in Claim 2, **characterised in that** the holes (14) of the plates (12) have a diameter of 1-10 mm.
- 20 4. The apparatus as claimed in Claim 3, **characterised in that** the holes have a diameter of 2-5 mm.
5. The apparatus as claimed in any of Claims 3 or 4, **characterised in that** the guide plate (11) has an extent below the foraminated plates (12) which at least
25 corresponds to the diameter of the holes (14) multiplied by ten.
6. The apparatus as claimed in any of Claims 3 or 4, **characterised in that** the guide plate (11) has an extent below the foraminated plates (12) which is 50-60 mm.
- 30 7. The apparatus as claimed in Claim 1, **characterised in that** the concentric distribution chamber (9) is designed so that the steam, on entering the pressure vessel (1), is downwardly directed and is at a speed of < 2 m/sec.

8. The apparatus as claimed in Claim 1, **characterised in that** the apparatus includes two steam inlets (8) which are diametrically placed and radially disposed.

1/3

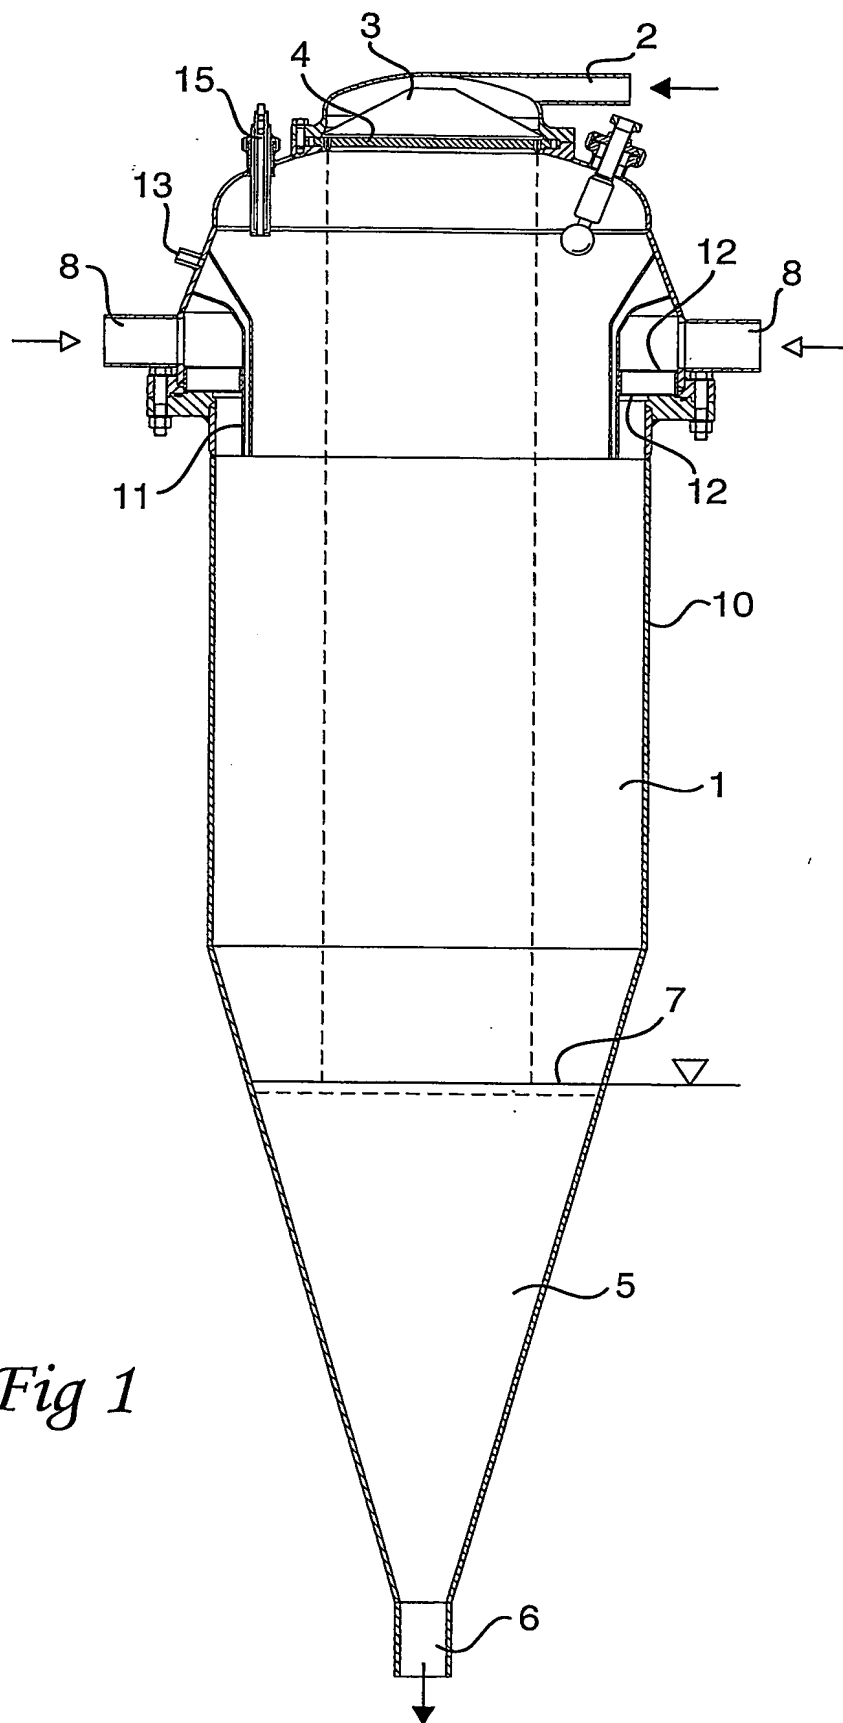*Fig 1*

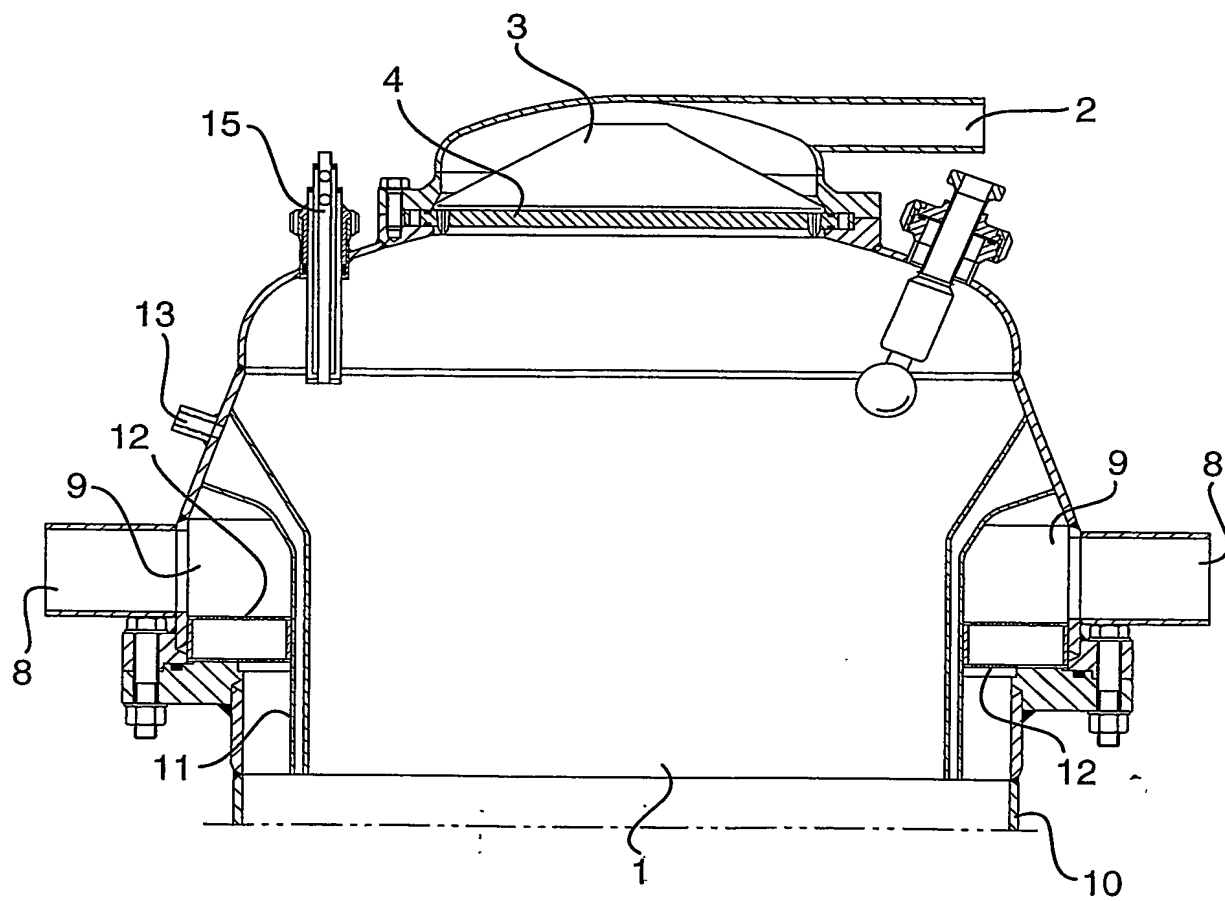*Fig 2*

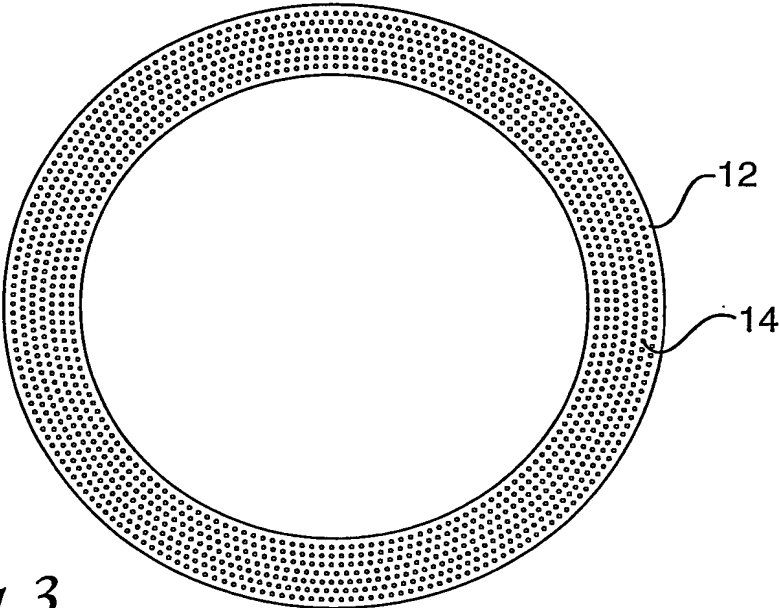


Fig 3

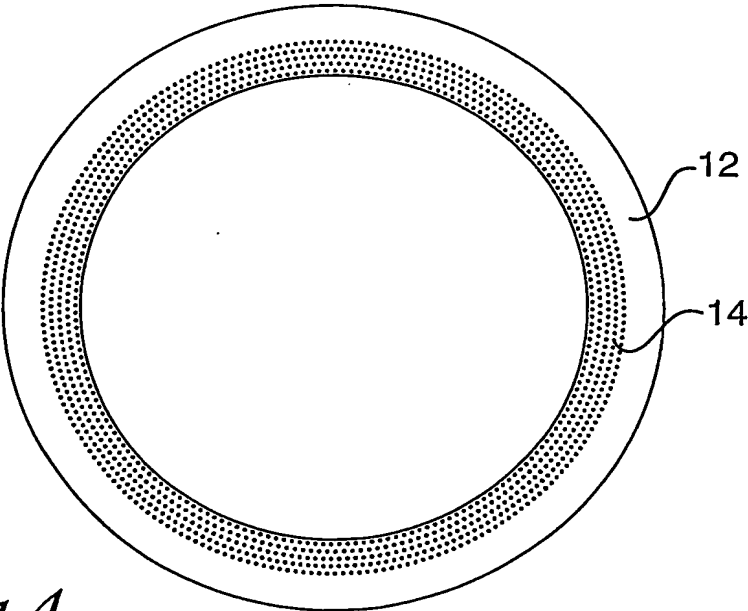


Fig 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00927

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: A23L 3/24, A23C 3/037

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: A23C, A23L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6168141 B1 (ARTUR G. ZIMMER), 2 January 2001 (02.01.01), column 2, line 31 - line 65; column 4, line 5 - line 29; column 6, line 38 - line 57, figure 1	1
A	--	2-8
X	GB 1420635 A (DASI INDUSTRIES, INC.), 7 January 1976 (07.01.76), page 1, line 49 - line 67; page 2, line 88 - line 97, figure 3, claim 2	1
A	--	2-8

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"B" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

5 Sept 2003

Date of mailing of the international search report

08-09-2003

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Inger Löfgren/Els
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00927

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5469781 A (KELSEY C. THOM, JR.), 28 November 1995 (28.11.95), column 2, line 26 - line 31, figure 2 --	1-8
A	EP 0402965 A2 (THE PROCTER & GAMBLE COMPANY), 19 December 1990 (19.12.90), column 3, line 13 - line 43 -- -----	1-8

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00927

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
US	6168141	B1	02/01/01	AU 3905200 A	09/10/00
				EP 1079695 A	07/03/01
				US 6251341 B	26/06/01
				WO 0056161 A	28/09/00

GB	1420635	A	07/01/76	NONE	

US	5469781	A	28/11/95	US 5501143 A	26/03/96

EP	0402965	A2	19/12/90	FI 902136 D	00/00/00
				GB 8909779 D	00/00/00
				PT 93918 A	08/02/91
